


## Aluminium butt hinge SYS-AL13-2.2

**SYSKO**

### Technical facts

Size:	102,0mm
Knuckle diameter:	20 mm
Hinge pin diameter:	12 mm
Hinge pin:	Stainless steel
Spring core:	Sleeve: steel galvanised, Spring: spring steel Stainless steel (additional charge)
Recommended fixation:	Door leaf: cylinder head screw (SS) M6 x 10 incl. screw cover (4 pieces included)
Packing unit:	30 hinges

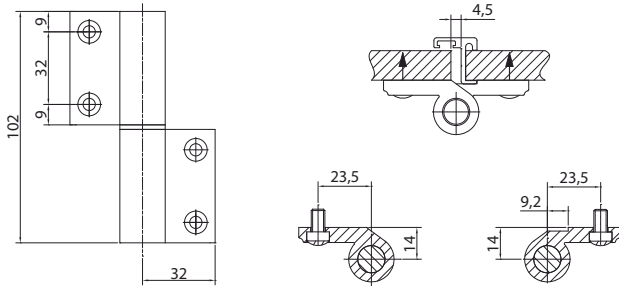

### Tender specification

SYSKO-Aluminium butt hinge Type: SYS-AL13-2.2 for unrebrated partition walls  
 2-parts butt hinge for fixation to door leaf without cutout  
 Hinge surface aluminium anodised or powder-coated  
 Bush bearing in nylon to guide hinge pins  
 Available as standard hinge (AL13-2.2S) or spring hinge (AL13-2.2F)  
 Unhinge safety for spring hinge (additional charge)

Article	Description	Order number
AL13-2.2S DIN L	Standard hinge aluminium anodised	84AL1322SEVL
AL13-2.2S DIN R	Standard hinge aluminium anodised	84AL1322SEVR
AL13-2.2F DIN L	Spring hinge aluminium anodised	84AL1322FEVL
AL13-2.2F DIN R	Spring hinge aluminium anodised	84AL1322FEVR
AL13-2.2S DIN L	Standard hinge powder-coated (11 colours - colour chart enclosed)	84AL1322S_ _ _ _L (Please specify RAL no.!)
AL13-2.2S DIN R	Standard hinge powder-coated (11 colours - colour chart enclosed)	84AL1322S_ _ _ _R (Please specify RAL no.!)
AL13-2.2F DIN L	Spring hinge powder-coated (11 colours - colour chart enclosed)	84AL1322F_ _ _ _L (Please specify RAL no.!)
AL13-2.2F DIN R	Spring hinge powder-coated (11 colours - colour chart enclosed)	84AL1322F_ _ _ _R (Please specify RAL no.!)
Additional charge	Unhinge safety for spring hinge	MP84AUSH
Additional charge	Spring core, spring and sleeve in stainless steel	MP84FKES102



### Notes

---



---



---



---



---



---



---



---



---



---