


# Clamping support leg U2-Aluminium (13 mm panel thickness)



## Technical facts

- Support foot: Steel galvanised or stainless steel (additional charge)  
M10x45 (including clip-on nylon plate)
- Support with U-clamp: Aluminium anodised – Ø 18 mm with U-clamp  
Aluminium powder-coated – Ø 18 mm with U-clamp  
Support length: 110 mm (150 mm ground clearance)
- Short shaft and flat rosette: Aluminium anodised for type U2.4
- Rosette with short shaft: Nylon (11 colours – find colour chart enclosed)  
for type U2.1 and U2.3
- Panel fixation: Screws DIN7983 4,8x 16 stainless steel (2 pieces) respectively  
Through-hole with sleeve nut (additional charge)

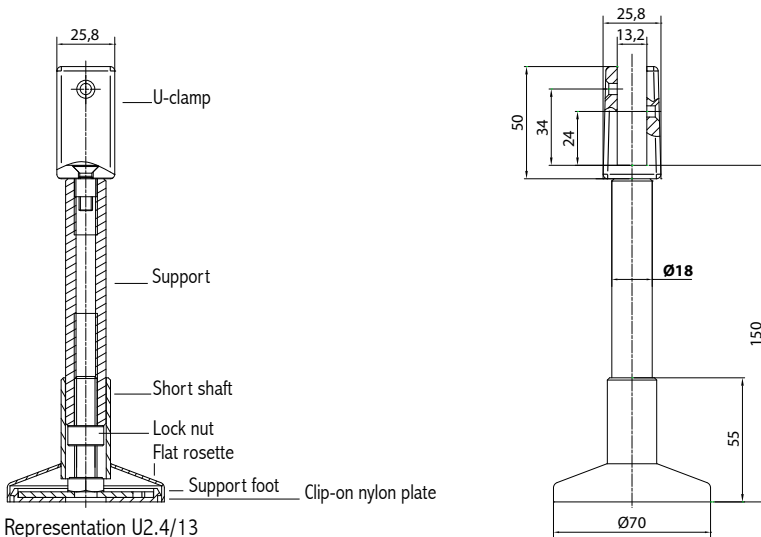

## Prices for 150 mm and 100 mm ground clearance.

Article	Description	Order number
U2.1/13	Complete support leg (support: aluminium anodised, short shaft rosette: nylon)	81U2113_ _ _ _ (Please specify RAL no.!)
U2.3/13	Complete support leg (support: aluminium powder-coated, short shaft rosette: nylon)	81U2313_ _ _ _ (Please specify RAL no.!)
U2.4/13 raw	Complete support leg (support, flat rosette and short shaft: aluminium raw)	81U24130
U2.4/13	Complete support leg (support, flat rosette and short shaft: aluminium anodised)	81U2413
Additional charge	Support foot in stainless steel	MP81GFES
Additional charge	Excess- and Short length aluminium support (up to 200 mm ground clearance)	MP81RUUEV
Additional charge through-hole	Sleeve nut and screw (steel galvanised) incl. screw cover	MP83SWSS13
Additional charge through-hole	Sleeve nut and screw (stainless steel) incl. screw cover	MP83SWSES13

## Notes

---



---



---



---



---



---



---



---



---



---