


Knock-in support leg K2

Technical facts

Support foot:	Steel galvanised or stainless steel (additional charge) M10x45 (including clip-on nylon plate)
Knock-in support:	Aluminium anodised – Ø 18 mm with thread Aluminium powder-coated – Ø 18 mm with thread Stainless steel – Ø 18 mm with threaded insert Support length: 210 mm (150 mm ground clearance)
Short shaft and flat rosette:	Aluminium anodised for type K2.4, stainless steel for type K2.5
Rosette with short shaft:	Nylon (11 colours – find colour chart enclosed) for type K2.1 and K2.3

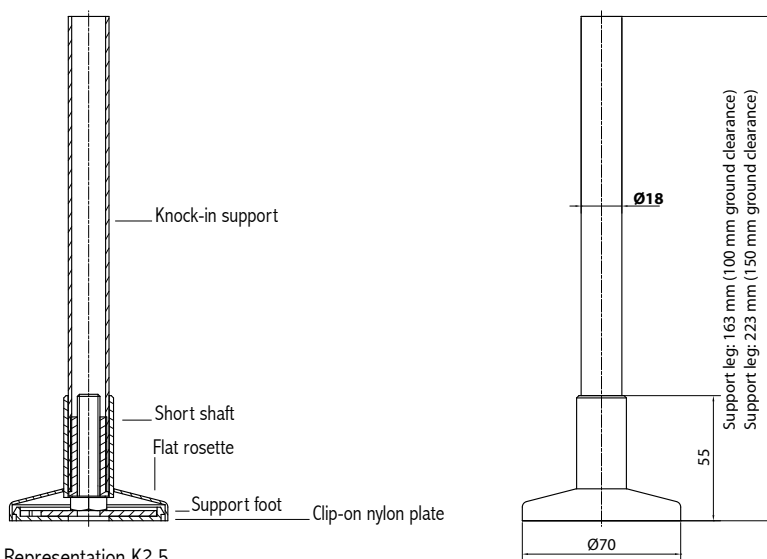

Representation K2.5



Prices for 150 mm and 100 mm ground clearance.

Article	Description	Order number
K2.1	Complete support leg (support: aluminium anodised, short shaft rosette: nylon)	81K21_____ (Please specify RAL no.!)
K2.3	Complete support leg (support: aluminium powder-coated, short shaft rosette: nylon)	81K23_____ (Please specify RAL no.!)
K2.4 raw	Complete support leg (support, flat rosette and short shaft: aluminium raw)	81K240
K2.4	Complete support leg (support, flat rosette and short shaft: aluminium anodised)	81K24
K2.5	Complete support leg (support, flat rosette and short shaft: ground stainless steel)	81K25
Additional charge	Support foot in stainless steel	MP81GFES
Additional charge	Excess- and Short length aluminium support (up to 200 mm ground clearance)	MP81KUUEV
Additional charge	Excess- and Short length stainless steel support (up to 200 mm ground clearance)	MP81KUUES

Notes
